




**INNOVATIVE SAFE
FOR CERTIFIED
GRADE II AND III
BURGLARY PROTECTION**

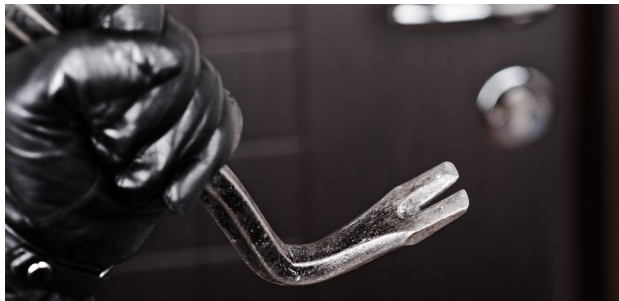

PROGUARD

BURGLARY-RESISTANT PROTECTION



KEY FEATURES


- Burglary protection in accordance with the European standard, EN 1143-1, as certified by ECB•S for Grades II and III
- ProGuard's special barrier material provides certified burglary protection whilst also keeping the total weight of the safe down. Less weight means greater installation options
- Innovations made with the Grade III models means that a higher level of protection can be offered in a safe with reduced wall thickness and increased interior capacity
- The three-way boltwork is constructed with solid steel bolts
- For additional security, ProGuard is fitted with an active relocker and anti-drilling plates have been incorporated into the boltwork to withstand burglary attempts
- Dependent on Grade, a Class A key lock or a Class B high security electronic lock, approved in accordance with EN 1300, are both available as primary lock options. Grade III models must have a minimum of 1 x Class B lock fitted as standard
- Every model can be customised with a range of internal fittings to maximise storage capacity
- ProGuard has a modern design with an ergonomic soft-touch handle

PROGUARD

PRODUCT SPECIFICATIONS

| Model | External height (mm) Gd II/III | External width* (mm) Gd II/III | External depth** (mm) Gd II/III | Internal height (mm) Gd II/III | Internal width (mm) Gd II/ III | Internal depth (mm) Gd II/III | Volume (litres) Gd II/III | Weight (kg) Gd II/III |
|-------|-----------------------------------|-----------------------------------|------------------------------------|-----------------------------------|-----------------------------------|----------------------------------|------------------------------|--------------------------|
| 60 | 530 | 500 | 521 | 430/440 | 400/410 | 360/359 | 62/65 | 234/209 |
| 110 | 690 | 600 | 561 | 590/600 | 500/510 | 386/396 | 114/121 | 334/315 |
| 150 | 875 | 600 | 561 | 775/785 | 500/510 | 386/396 | 150/159 | 402/377 |
| 200 | 1150 | 600 | 561 | 1050/1060 | 500/510 | 386/396 | 203/214 | 501/486 |
| 300 | 1600 | 600 | 561 | 1500/1510 | 500/510 | 386/396 | 290/305 | 744/655 |
| 350 | 1600 | 675 | 585 | 1500/1510 | 575/585 | 410/420 | 354/371 | 846/703 |
| 450 | 1850 | 675 | 616 | 1750/1760 | 575/585 | 440/451 | 443/463 | 981/813 |

Projection of hinge *(20mm) and handle **(65mm) not included

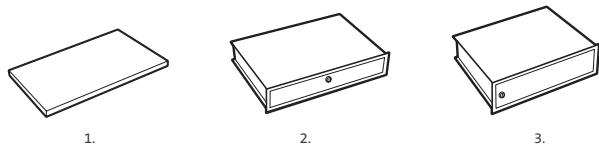

INTERNAL FITTINGS

- 1. Shelf - 20mm high - all sizes
- 2. Full width drawer - 100mm high - sizes 110 - 450
- 3. Lockable cupboard - 335mm high - sizes 110 - 450

LOCK OPTIONS

As the primary locking option, ProGuard safes can be fitted with either a high-security electronic lock or a key lock. For Grade III models, at least one EN 1300 Class B lock must be fitted as standard.

All locks are tested by ECB•S and are certified in accordance with the EN 1300 standard.

BURGLARY TESTING



ProGuard has been approved by ECB•S in accordance with the European standard, EN 1143-1, for burglary protection in Grades II and III.

A range of attack tools were used to test ProGuard's level of resistance, from basic tools to sophisticated thermal and electrical equipment.



Approved by the Association of Insurance Surveyors

IMPROVED CAPACITY

Innovations made with the Grade III models have allowed the thickness of the safe walls to be reduced. This means that a safe with a higher level of protection will also offer greater capacity for the storing of valuable items and sensitive documents.

Authorised dealer



www.chubb-safe.co.uk
Tel:0800 6129456

www.chubbsafes.com